

## GTC

### Model GTC 040 T 0075 A3 XX

#### ELECTRIC MOTOR

three phase 380V - 0,75 Kw 1450 rpm IP54

#### GEAR PUMP

40 l/min with inbuilt relief valve 1MPa (10 bar)


INLET and OUTLET flexible hoses 2 m long,  
with rigid ends 0,5 m long

“Y” type filter for pump protection

#### CLOGGING INDICATOR:

pressure gauge

(on request: differential indicator - see ROL brochure)

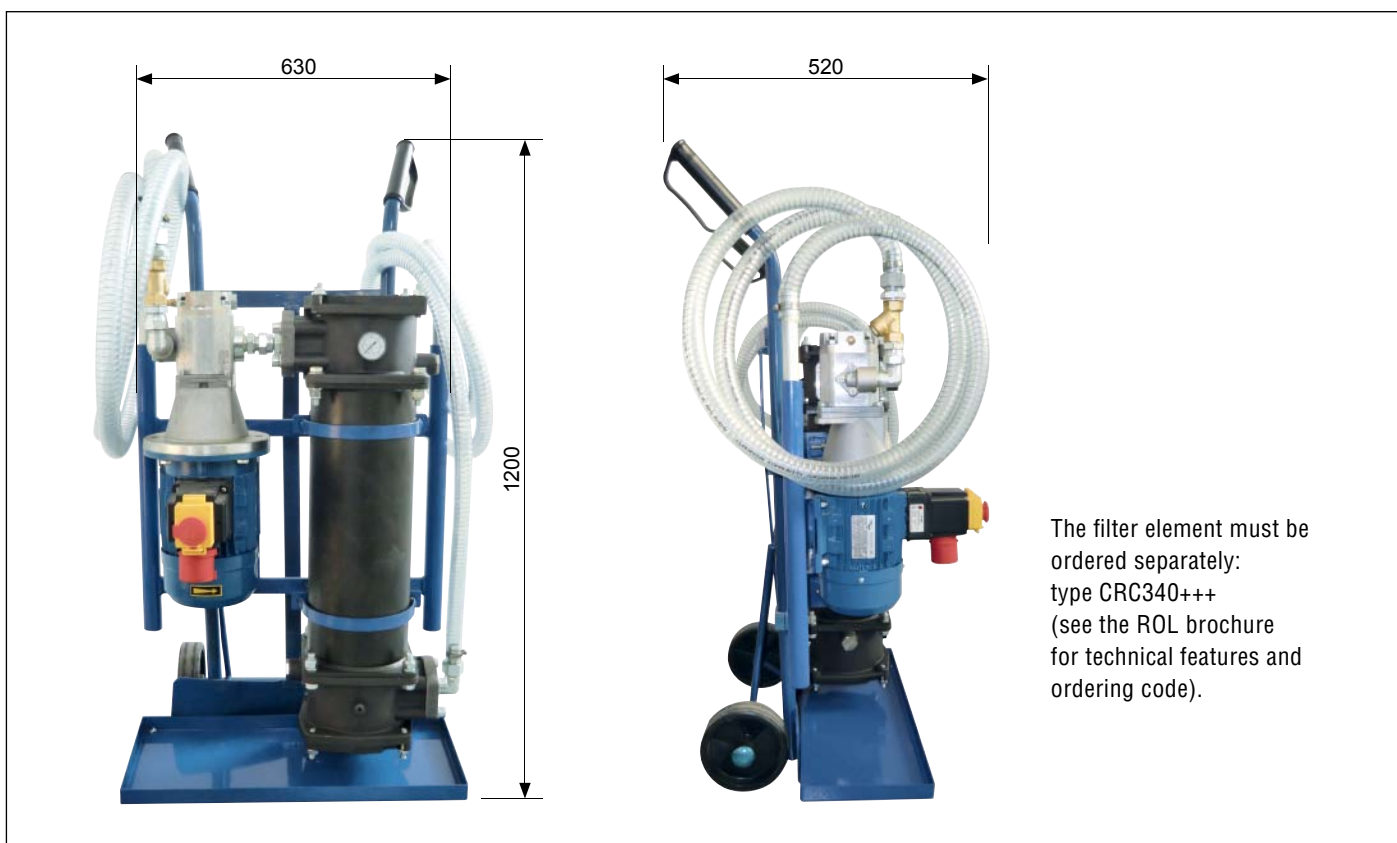

The filter element must be ordered separately:  
type CRC340+++  
(see the ROL brochure for technical features and ordering code).