


CETOP-08R PRESSURE RELIEF VALVE



Characteristics

Symbol


TYPE	MAX FLOW	MAX PRESSURE	WEIGHT
VM-08R	200 l/min.	350 bar	Kg. 6.5




Description

Two-stage pressure relief valve equipped with balanced poppet, designed to operate in hydraulic systems. The piloting pressure of the poppet, placed in the upper stage, is adjusted by a screw (clockwise the pressure increases). It can be supplied with venting solenoid valve.

Dimensions

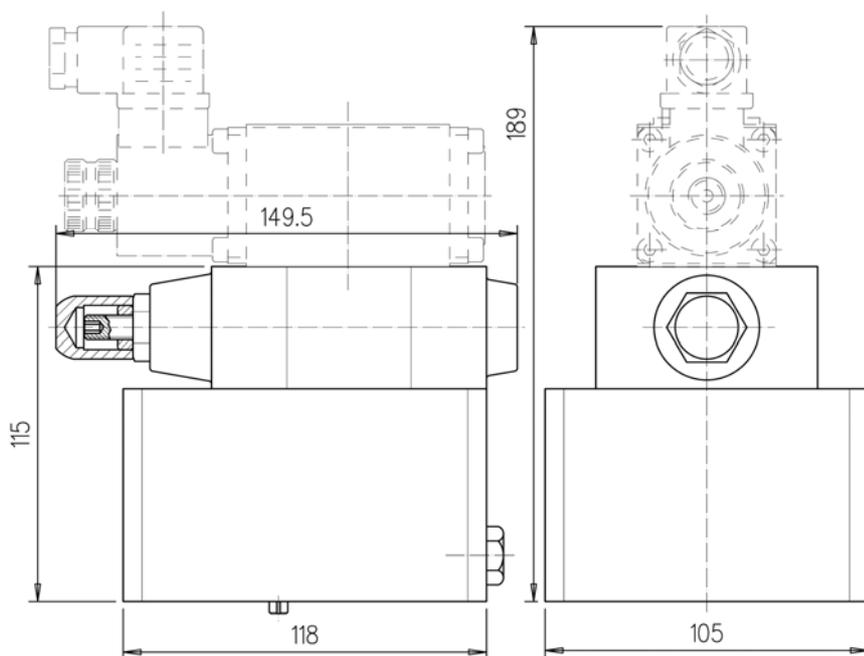

Gaskets
N°2 OR-4112
N°1 OR-109
Fastening screws
N°4 VTCE M16x70

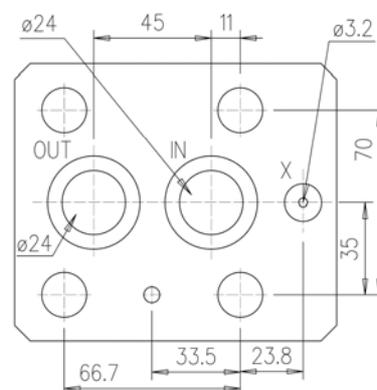


Installation rules

- The valves type VM can be mounted in any position.
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 e 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25μ
- Hydraulic fluid temperature: from -20° to +75°C


CETOP-08R PRESSURE RELIEF VALVE



Diagrams

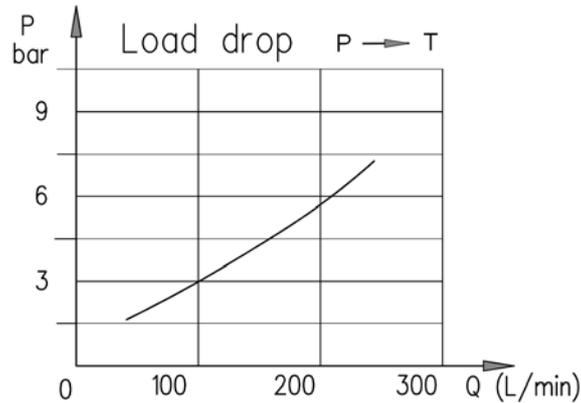

Pilots table

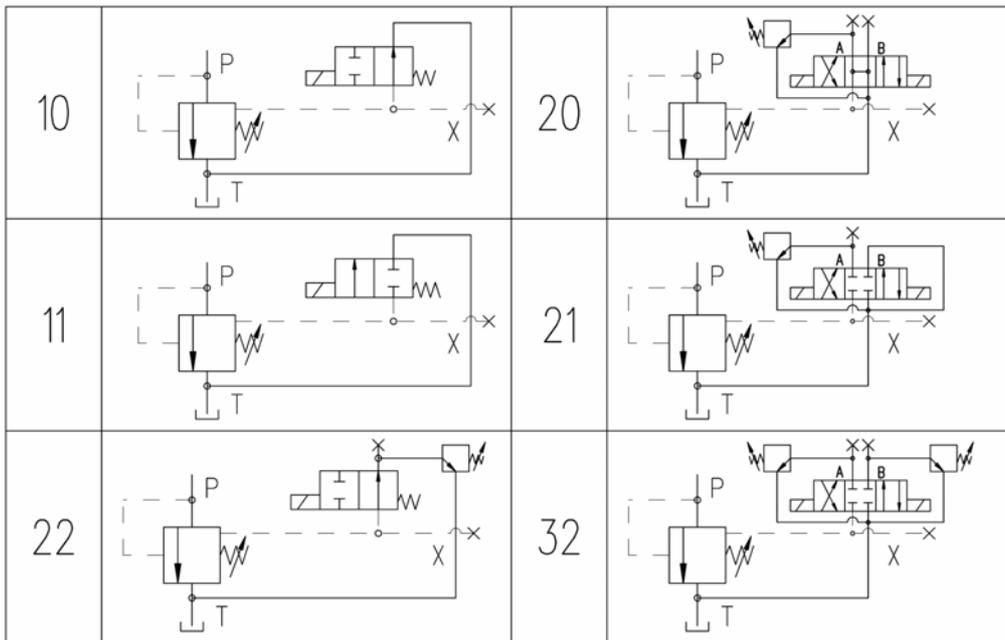

Ordering code

VM-08R / * / *** / * / * / ***** / ** / *

V = with handwheel

Synthetic fluids: **WG** = water-glycol **PE** = phosphate ester

Supply voltage :	Direct current	Alternate current
	12DC	110/50/60
	24DC	230/50/60
	28DC	48/50
	110 RC	(other voltages on request)

X = without connector
N = with DIN-43650 IP-65 connector
Q = connector with built-in rectifier bridge

D = external drain 1/4" BSP

Pressure range diagram : **100**=06-100 bar **210**=07-210 bar **350**=08-350 bar

Type of pilot (see pilots table)

P = pre-arrangement for pilot

10	= one setting ; venting with de-energized solenoid
11	= one setting ; venting with energized solenoid
22	= two settings ; without venting
20	= two settings ; venting with de-energized solenoid
21	= two settings ; venting with energized solenoid
32	= three settings ; without venting

CETOP-08R pressure relief valve