

CETOP-03 CAM OPERATED MONITORIZED DISTRIBUTOR




Characteristics

TYPE	Max pressure		Suggested max flow	Weight
	P - A - B	T		
DLCR-03-3-1/2-M	350 bar	160 bar	50 l/min	1.3 Kg.


Description

Cetop-03 cam operated monitorized distributor. Its main application is on safety gates of hydraulic presses, especially of injection plastic machines.

Symbol



Dimensions

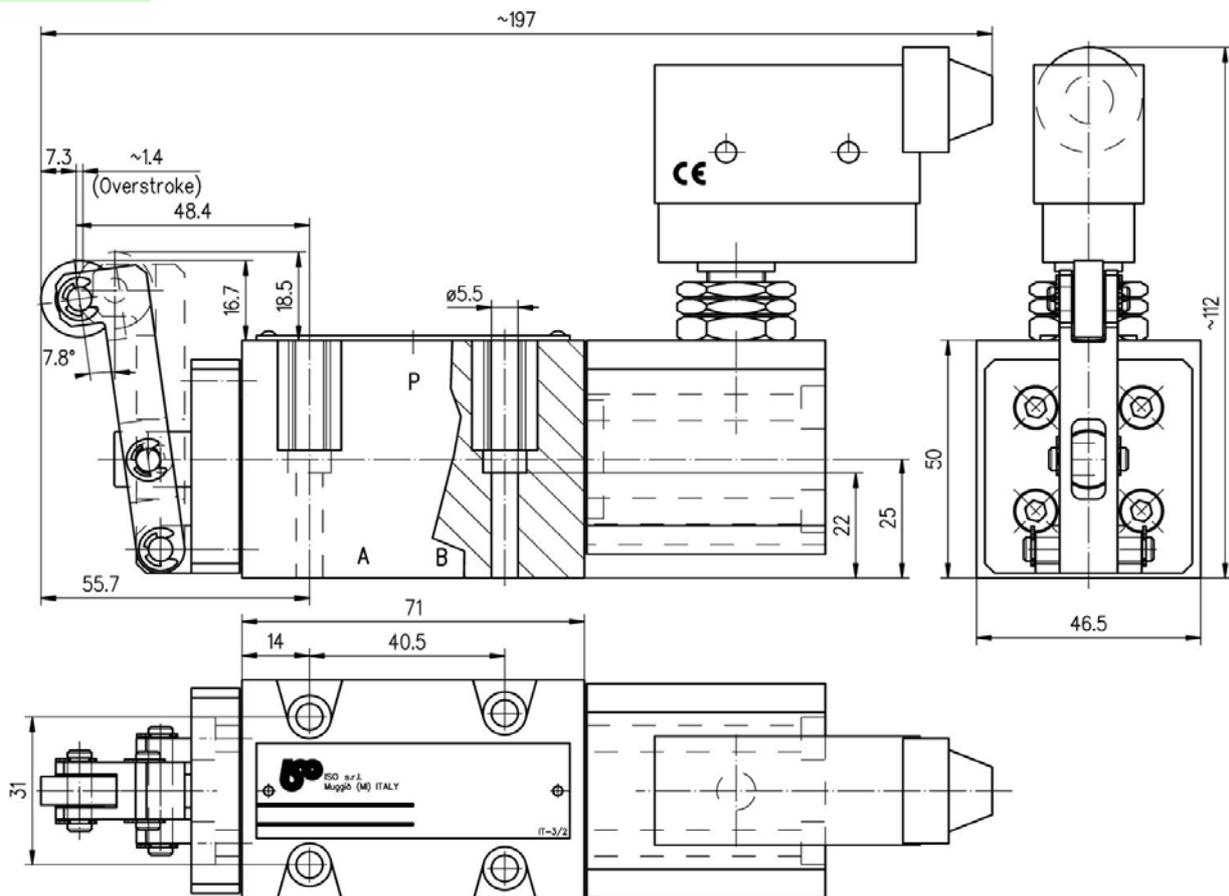

Installation rules

- The distributors type DLCR-03 can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

DLCR-03-3-1/2-M

Cam operated and monitorized distributor